

X-SMART


(EL1250H)

LED LIGHT TOWER

- Full run time 288 hrs - that's almost a full month of darkness on one tank of fuel! Refuel once a month verses five times a month with metal halide towers. Save on fuel and labor refueling costs!
- 4 high efficiency, no maintenance LED lamps have a 5 year warranty and are easily tilted & rotated by hand
- 1000 hour engine service interval
- Galvanized, hydraulically operated vertical mast fully raises in 10 sec. with the push of a button
- Set the timer and go! No need to send labor to start every night - 16 event 7 day digital timer, and dusk to dawn switch
- Built for a long life! Rugged 10 gauge steel enclosure and fenders are galvanized and powder coated inside and out
- 110% containment base
- Towers are compact making transport easier! Dry weight 15 units per 48' trailer or 16 units per 53' trailer

Optional

- Anti-glare LED light heads

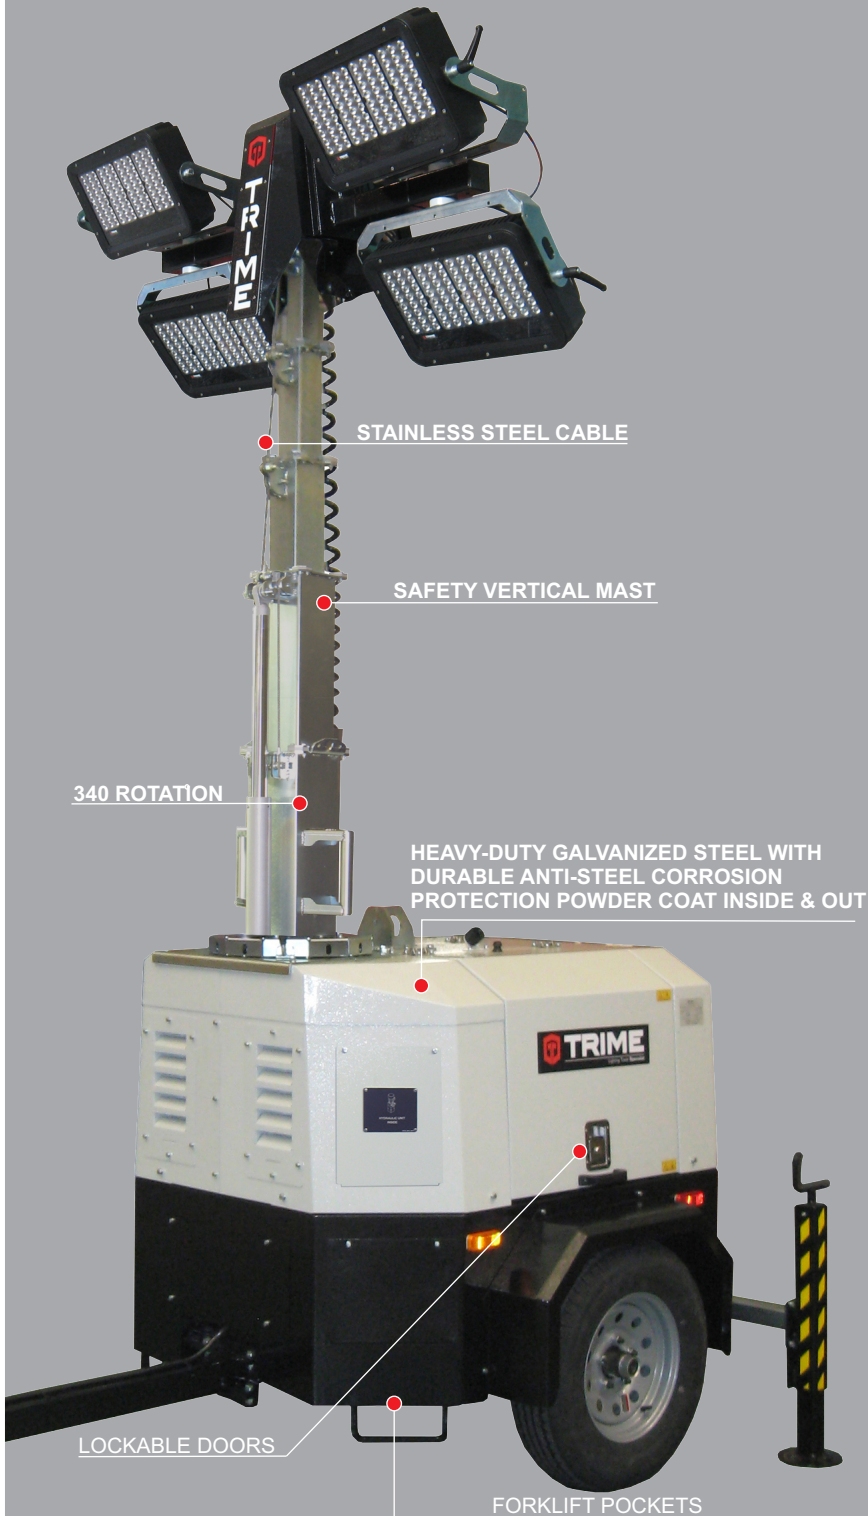

Trime X-Smart (EL1250H) Specifications

Mast, Dimensions & Weight		
Mast Height	26'	
Wind Rating	50 mph	
Fully Retractable Stabilizers	Y	
Axle	Torsion	
Drawbar	Tubular Steel	
Unit Dimensions - Stowed	63" x 56" x 95"	
Operating Dimensions	98" x 100" x 315"	
Dry Weight	2107	
Operating Weight	2429	
Engine		
Make	Kubota*	Kohler*
Model	Z482-E4B	KDW702
Emission Regulation	Tier 4	
Type	Vertical 4 Cycle Liquid Cooling Diesel	
Cylinder	2	
Displacement / L (cu. In.)	0.479 (29.23)	
Combustion System	IDI	
Intake System	Naturally Aspirated	
Maximum Speed	1800 rpm	
Sound Level @ 23'	65 dBA	
Alternator		
Make	Linz	
Output	4.2 kVA	
Hz	60	
Fuel		
Type	Diesel	
Fuel Capacity	46 gal.	
Run Time	288 Hrs	

*Specs subject to change. Ask about engine.

Applications



**Construction
& Work Sites**



**Emergency
Response**



**Rural & Hard
to Reach Areas**



**Gas, Oil
& Mining**



**Special
Events**





**Military
Applications**



4 high efficiency
LED heads equaling 1280W
(equivalent to 8000W metal halide)

Illuminated area = 53,820 sq ft

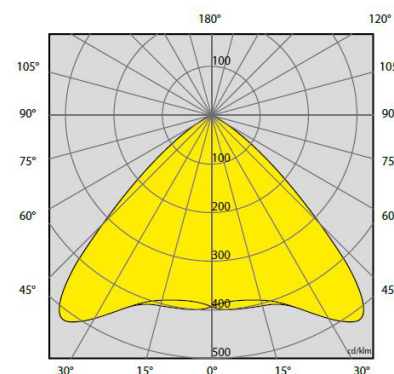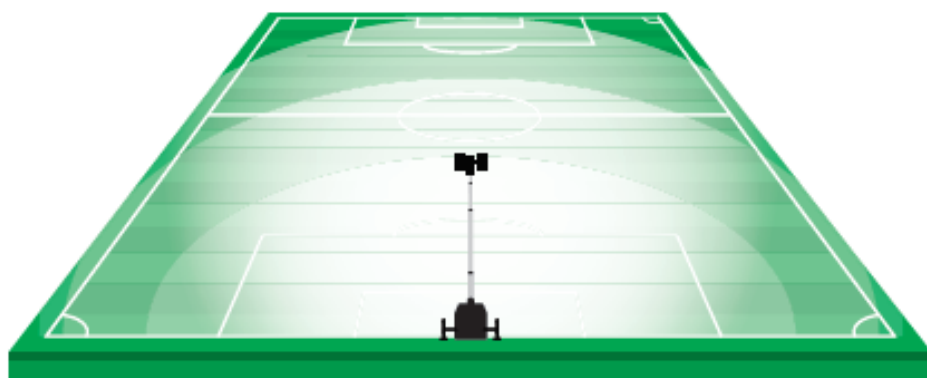

Trime US, Inc.
3 Killdeer Court, Suite 301
Swedesboro, NJ 08085
www.trimeusa.com

(877) 97TRIME
(877) 978-7463
sales@trimeusa.com